


CQSA-E 1024

Ethernet Stand Alone multiprotocol interface



With an Ethernet port in addition to the familiar USB port, the CQSA-E 1024 enables long distance access and communication with the device anywhere on a Local Area Network (LAN & WLAN). Connecting to an access point or WiFi router allows for easy remote settings and control with a mobile or tablet using the Wi-Light 2 APP.

A 5-in-1 multiprotocol Stand Alone device featuring DMX In/Out, Art-Net Out, sACN Out, Node (Art-Net to DMX decoder), and Splitter, the CQSA-E is a versatile and essential tool designed to meet the needs of the widest array of lighting projects, performances and installations.

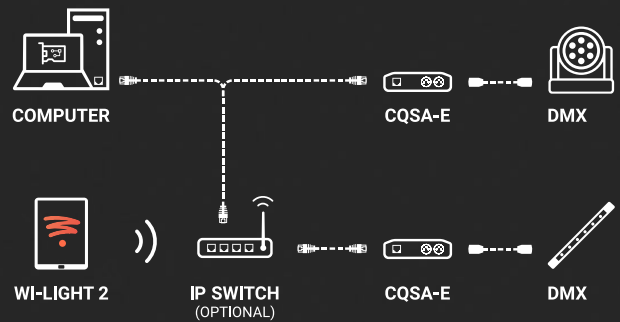


10th
YEAR
ANNIVERSARY

↓
FREE

DESIGNED & DEVELOPED
IN FRANCE

5
YEAR
WARRANTY

CHROMATEQ

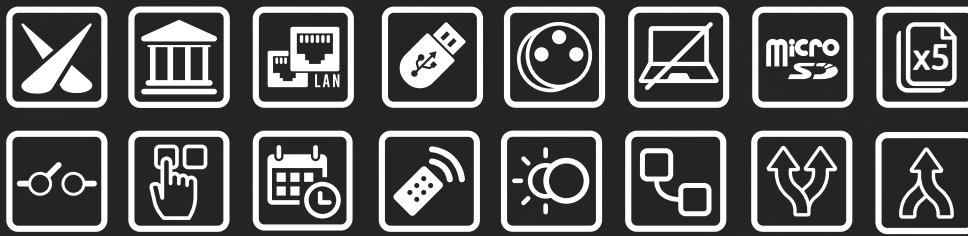

HARDWARE Options

DMX Output	2x512 or 1024 In/Out channels PC and Stand Alone
Ethernet	ETHERNET port for Local Network connection (LAN, WLAN) with up to 128 devices connected
APP Control	Wi-Light 2 APP (Android + iOS, Ethernet, LAN, WLAN, Internet)
Multiple Zone	5 Zones, play up to 5 different scenes/sequences at time in Stand Alone
Memory	Micro SD Card (all FAT format, up to 256 GB) + Internal memory (No SD card required)
DMX Modes	DMX In/Out, DMX Splitter, DMX Merge, DMX Record, DMX Trigger
Art-Net	2x512 on Ethernet (SD card required, 8x512 per device in option)
sACN	2x512 on Ethernet (SD card required, 8x512 per device in option)
Node	2 ports, Art-Net to DMX decoder and converter (DHCP, Static IP)
Stand Alone Options	6 selectable modes: Buttons (8), Pages (10), Zones (5), Colour (99 RGB + 8 RGBW) Art-Net from SD card including triggers (2x512, up to 8x512 in option) sACN from SD card including triggers (2x512, up to 8x512 in option) Setting and configuration via Wi Light 2 App Commands from the Contacts (speed, scene, dimmer, zone) Time Clock setting adjustable in Stand Alone. 16-bit and fine channel management Automatic Scene Recovery if the power is cut off Cross Fade time between scenes Turn Off display after 4s., Default start scene, Dimmer and RGB color selection Master/Slave mode with Up to 64 devices combined and synchronized (128 universes)
Triggers (Stand ALone)	8 Buttons with blue status LED, 10 pages, UDP / Ethernet triggers and commands (from SDK) Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year) 7 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority, 127 contacts max) Commands from the Contacts (speed, scene, dimmer, zone) DMX input (DMX signal from DMX devices) Infrared Remote, Light intensity (with optional deported PCB and remote)
Max DMX outputs	x12 USB connected = 24 DMX or 127 Ethernet = 254 DMX
Power	5V DC (USB), 5 to 24V. - 0.2A (DC connector), 0.2W, High Voltage Protection
Dimension	H : 38mm (1.49in) / W : 166mm (6.54in) / D : 97mm (3.82in)
Housing	Black ASB plastic with 4 mounting slots
I/O Connectors	Mini USB 2.0, 3 pin XLR (XLR5 optional), RJ45 (Triggers, I/O)
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	5 years

SOFTWARE Options



LED Player	Up to 64x512 DMX Outputs	<h3>FREE SOFTWARE</h3> <p>Download and Update</p>
Pro DMX	30 mns Audio and Video Timeline	
Pixxem	Up to 255x512 DMX Outputs	
Studio DMX	3D viewer in real time, Full mode	
Wi-Light 2 APP	Software and device control (Android, iOS)	
Art-Net Output from PC	2x512 DMX Outputs per device	
System Compatibility	Windows, iOS, Linux	
Technical support	Worldwide, English, French, Chinese	

Mobile minimum configuration:

Android 5 / iOS 10
1Ghz CPU, 1 Gb RAM, 60 Mb disk
Screen resolution 1280x800
WIFI 802.11 b/g/n

PC minimum configuration:

Windows / Mac OS / Linux (Device)
2Ghz CPU, 8 Gb RAM
2Gb RAM graphic card
500 Mb disk
1 USB port (Device)
1 Ethernet Port (for Art-Net & sACN)

Software & App download:

Software package download: <https://www.chromateq.com>
Wi Light 2 app download (iOS): <https://apps.apple.com/us/app/wi-light-2/id1523046687?l=fr>
Wi Light 2 app download (Android): <https://play.google.com/store/apps/details?id=com.chromateq.wilight2>

191 Allée de Lauzard
34980 St Gély du Fesc, FRANCE
Web: www.chromateq.com
Email: info@chromateq.com
Phone: +33 952210755
Wechat: Chromateq
WhatsApp: +8613422062209
QQ: 2908265661



www.chromateq.com
Contact • Support • Download