



## TOOLbox adapter

### Introduction

The TOOLbox adapter is an add-on to the [TOOLbox pro](#) that enables programming of eldoLED drivers without line voltage. It is required if OEM configuration jigs are to be used. For an overview on driver & software compatibility see [Compatibility overview for eldoLED Tooling](#).

What is included	TOOLbox adapter One 3ft (1m) RJ45 to RJ45 cable
------------------	----------------------------------------------------

### Product offering




Product	Description	Part number	CI code
TOOLbox adapter	Add-on for TOOLbox to enable powerless programming	<a href="#">TLA20501 REV. 2A</a>	*252T6W

### Accessories

Product	Description	Part number	CI code
TOOLbox pro replacement cable	2ft (0.6m) RJ45 to LEDcode, DALI, DMX cable	TLC03051	*236MG0
TOOLbox pro	eldoLED TOOLbox pro v18.11 HW Rev 4.2	<a href="#">TLU20504-REV004</a>	*26037Y
3.5mm Touch-and-Go Programmer	3.5mm handheld programmer for FluxTool	<a href="#">PJ0035HH1</a>	*245LJ9
5.0mm Touch-and-Go Programmer	5.0mm handheld programmer for FluxTool	<a href="#">PJ0050HH1</a>	*245LJC



**Product details**

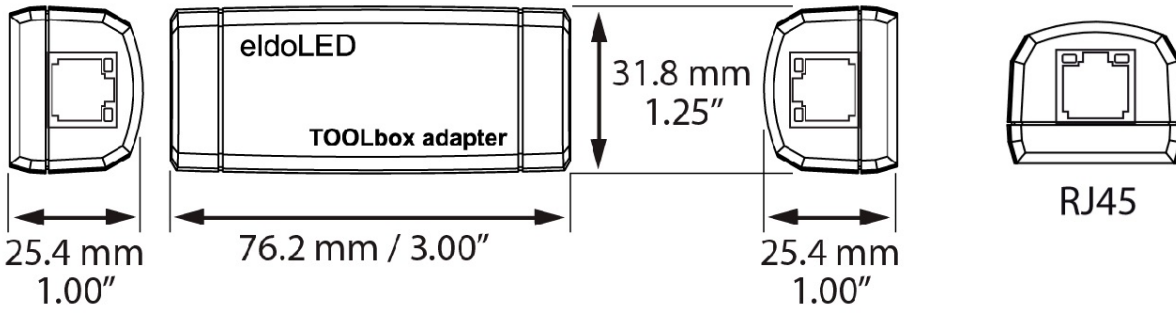

Weight	33 g
Data in	USB A (PC) to mini USB (TOOLbox)
Data out	RJ45 DMX: pin 1 (DMX+), 2 (DMX-) and 7 (DMX shield) DALI: pin 4 (DALI -) and 5 (DALI +) LEDcode: pin 6 (LEDcode+) and pin 8 (LEDcode-)
Operating ambient temperature (Ta) range	-20 °C to +50 °C

**Warranty**

Warranty period	<a href="#">General Terms and Conditions</a>
-----------------	----------------------------------------------

**Safety**



Use of a galvanic USB isolator may be required to avoid LED engine damage while using the TOOLbox with PC that is not properly grounded.

**Europe, Rest of World**

eldoLED B.V.  
Science Park Eindhoven 5125  
5692 ED Son  
The Netherlands

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)

**North America**

eldoLED America  
One Lithonia Way  
Conyers, GA 30012  
USA

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)