


WT5

WiFi + RF

WiFi & RF 5 in1 LED Controller

- 5 in 1 function, used for control RGB, RGBW , RGB+CCT , color temperature or single color LED strip.
- DC power socket input and 5 channel constant voltage output.
- Tuya smart APP cloud control, support on/of f, RGB color , color temperature and brightness adjust, delay turn on/of f light, timer run, scene edit and music play function.
- Voice control, support for Amazon Alexa, Google Assistant, Tmall Genie and Xiaodu voice assistant.
- Match with RF 2.4G remote control optional.
- User need set light type by press key before Tuya smart APP network connection and match RF remote of the same light type.
- Each WT5 controller can also work as WiFi-RF conver ter then use Tuya smart APP to control one or more RF LED controller or RF LED dimming driver synchronously
- Light on/off fade time 3s selectable.


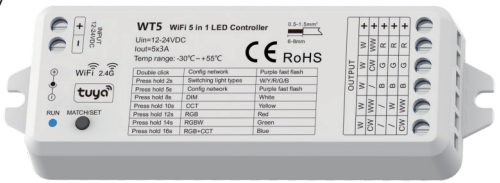


CE RoHS

Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	12-24VDC	Input signal	WiFi +RF 2.4GHz	EMC standard	EN IEC 55015/EN IEC 61547 ETSI EN 301 489-1/-3/-17
Input current	15.5A	Control distance	30m(Barrier-free space)	Safety standard	EN 61347-1/-2
Output voltage	5 x (12-24)VDC	Dimming gray scale	4096 (2^12) levels	Radio Equipment	ETSI EN 300 440 ETSI EN 300 328
Output current	5CH,3A/CH	Dimming range	0 -100%	Cer tification	CE RoHS
Output power	5 x (36-72)W	Dimming cuve	Logarithmic	W arranty and Protection	
Output type	Constant voltage	PWM frequency	1000Hz (default)	W arranty	5 years
Environment		Package		Protection	Reverse polarity Over-heat Short circuit
Operation temperature	Ta: -30 °C ~ +55 °C	Size	L120 x W43 x H27mm		
Case temperature (Max.)	Tc: +85 °C	Gross weight	0.073kg		

Mechanical Structures and Installations

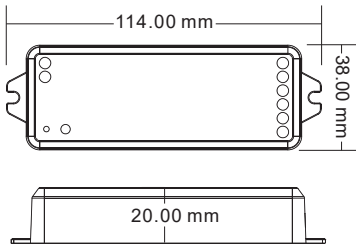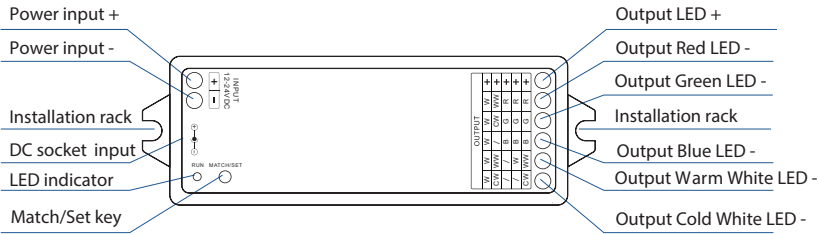

System W iring

